

## Wall Mount Glass Clamp


Glass Thickness: 5/16" (8 mm) to 1/2" (12 mm) glass

**CALIFORNIA PROPOSITION 65 WARNING:** This product can expose you to chemicals including Lead which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov).

## PARTS INCLUDED:

- 1 pc Mounting clip
- 1 pc Hexagonal wrench
- 3 pc Gasket- 1mm thick. For 9-12mm thick glass, insert one on either side of glass.  
For 8mm glass insert, 2 on one side, on one the other side of glass.
- 1 pc Decorative screw cover
- 1 pc 1-1/2" screw
- 1 pc Tile or marble anchor

## MOUNTING INSTRUCTIONS:

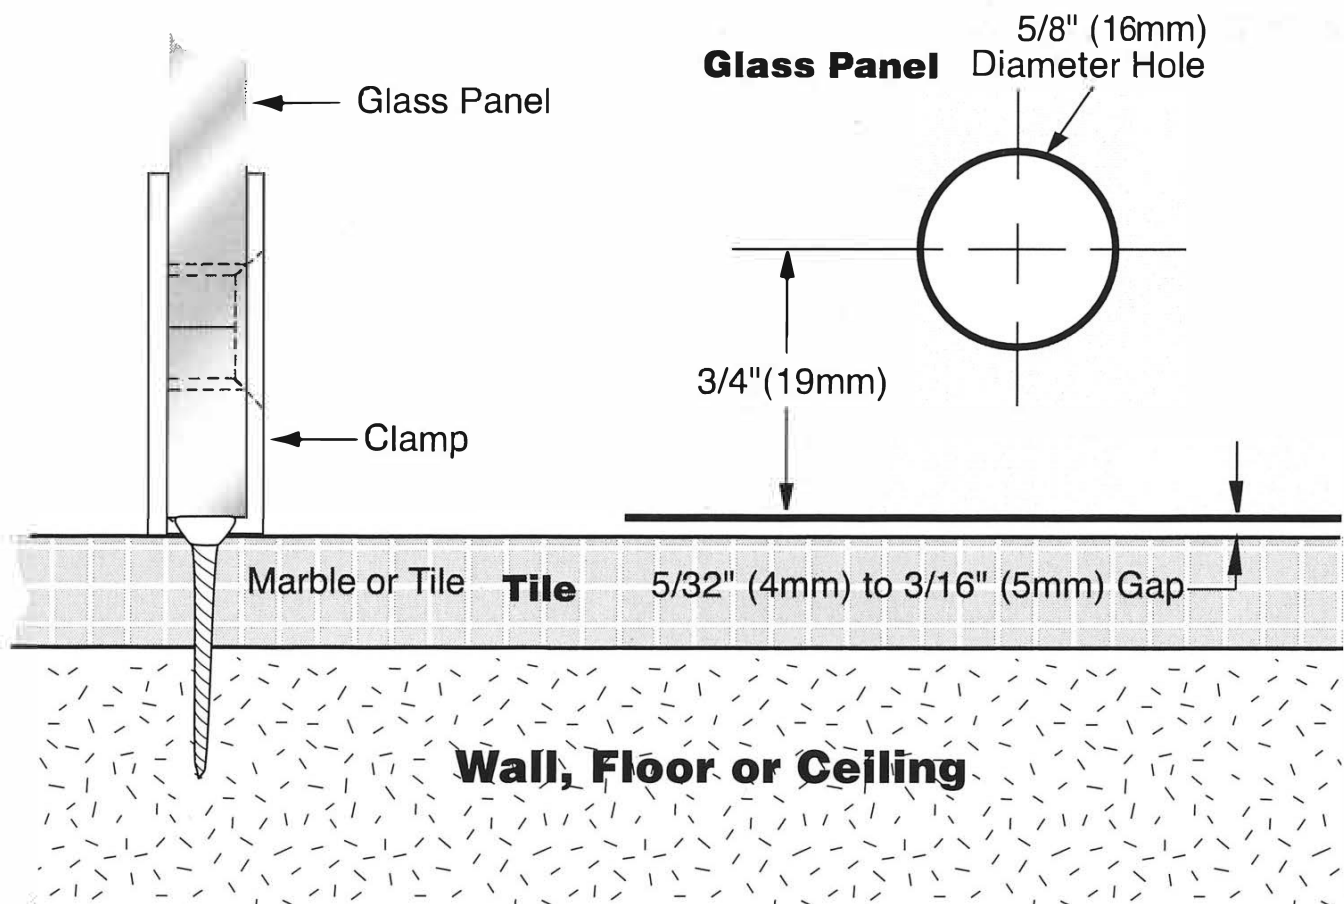

## PRODUCT SPECIFICATIONS

*Maximum Door Capacities	5/16" (8mm)		3/8" (10mm)		1/2" (12mm)	
	Glass Weight	Door Width	Glass Weight	Door Width	Glass Weight	Door Width
Using 2 Hinges	99 lbs.(45 kgs)	28" (711mm)	99 lbs.(45 kgs)	28" (711mm)	99 lbs.(45 kgs)	28" (711mm)
Using 3 Hinges	147 lbs.(67 kgs)	32"(813mm)	147 lbs.(67 kgs)	32"(813mm)	147 lbs.(67 kgs)	32"(813mm)

## SPECIFICATIONS

1. Max capacity: 99 lbs/ 45 kgs (in pairs)
2. Glass Material: Tempered safety glass
3. Glass Thickness: 5/16" (8 mm) to 1/2" (12 mm) glass

## CLEANING and MAINTENANCE INSTRUCTIONS

1. We do not recommend the use of chemical cleansers, abrasives or furniture polish on our lacquered finish.
2. Hardware may loosen over time. Periodically check to make sure all connections are tight. Re-tighten if necessary
3. Use household oil for squeaks. Do not use spray lubricant on these hinges.

Thank you for your purchase  
Customer Service: 888 401-1900  
[www.rejuvenation.com](http://www.rejuvenation.com)