REJUVENATION®

West Slope 37-9.5HC


Deck Mounted Hot & Filtered Water Dispenser with Square Neck


Includes Instant Hot Heating Tank (K-IHHT) and Water Filtration System (K-FS) Fits Deck Up To 2-1/4" Thick Recommended Mounting Hole: 1-1/8" (No Larger than 1-3/8") 1/4 Turn Ceramic Cartridge Handle Is NOT Spring Loaded Includes: Connection Hardware, Metal Supply Line Hoses, and 2' of Silicone Tubing to Connect to Hot Water Tank All Lead-Free Brass Construction Spout Can Swivel 360°

Professional Installation Required Available in the following finishes:

- Polished Chrome
- Polished Nickel
- Brushed Nickel
- Oil Rubbed Bronze
- Aged Brass

Watermark Designs reserves the right to make revisions without notice to produce specifications. All product dimensions are nominal.

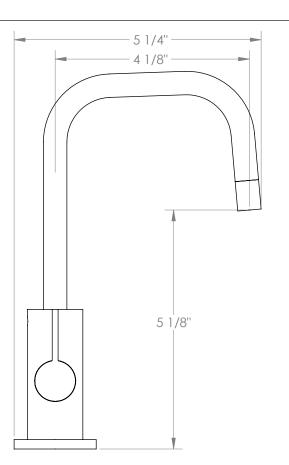

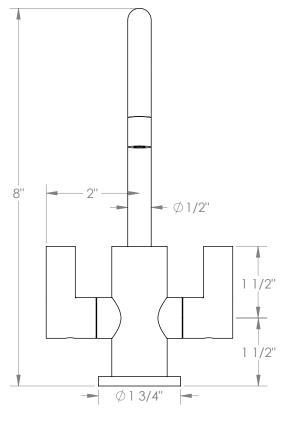

11/29/2021

2550 NW Nicolai St. Portland, OR 97210 USA | T: 1 888 401 1900 | F: 1 800 526 7329 | customerservice@rejuvenation.com

REJUVENATION°





K-IHHT Instant Hot Heating Tank

5/8 Gallon Stainless Steel Tank Max Temperature: 190° ±5° F (Temperature Is Adjustable) Heats Up to 60 Cup of Water Per Hour Has Indicator Light and Sensor Preventing Dry Start-Up RO Filter Compatible Electrical Specifications: 120 VAC, 60 Hz, 1300 Watts 10.83 Amps - Connect to 15 or 20 Amp Circuit Includes Mounting Bracket Professional Installation Required



Watermark Designs reserves the right to make revisions without notice to produce specifications. All product dimensions are nominal.

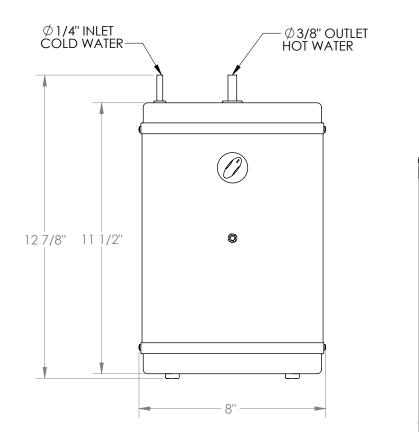

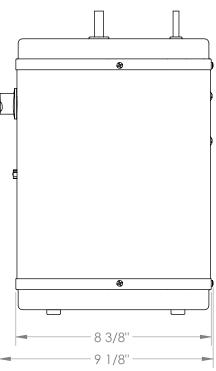

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings".

11/29/2021

2550 NW Nicolai St. Portland, OR 97210 USA | T: 1 888 401 1900 | F: 1 800 526 7329 | customerservice@rejuvenation.com

REJUVENATION®




K-FS Full Flow Filtration System

Utilizes Powdered Activated Carbon and Lead Absorbent Media Filter removes 99.9% of particles over .5 microns and incorporates an anti-microbial agent to reduce bacterial growth NSF Certified to Remove the Following: Lead, Sediment, Algae, Iron, Mold, Rust 1/4 Turn Automatic Shutoff Valve Allows For Easier Cartridge Changes 1250 Gallon Capacity Flow Rate: 0.5 GPM; Pressure: 10-125 PSI Cold Water Use Only (35-100° F) Includes 5' of 1/4" Tubing



Watermark Designs reserves the right to make revisions without notice to produce specifications. All product dimensions are nominal.

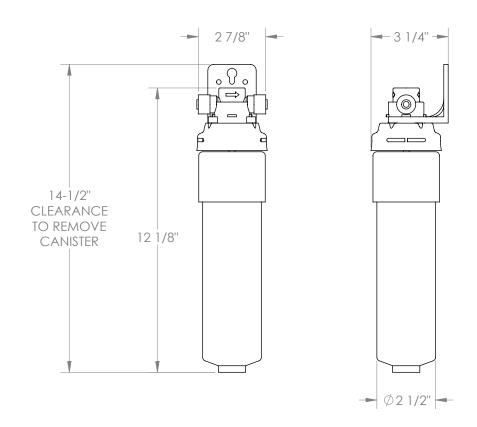

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings".

11/29/2021

2550 NW Nicolai St. Portland, OR 97210 USA | T: 1 888 401 1900 | F: 1 800 526 7329 | customerservice@rejuvenation.com